



SMKROADKINGS



# GET ON BOARD!!

Whether you're a seasoned rider or just starting your journey, our motorcycles offer the perfect blend of power, performance, and style to elevate your riding adventures!!

**ALL PRICES INCLUDE DUTY AND  
SHIPPING**

[www.smkroadkings.com](http://www.smkroadkings.com)

Phillip: +861 568 622 7669

LAMECK: +263 782 067 002

TINO: +861 568 622 0390



# Honda CBR 1000RR-R Fireblade SP



Starting From \$19 000

Engine: Standard  
 Engine Type: Horizontal In-line  
 Cylinders: 4  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid  
 Valves :16  
 Valves per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 13:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: Yes  
 Carburetion Type: Fuel Injected  
 Speed Governor: No

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length(in/mm): 82.7 / 2101  
 Width (in/mm) : 29.3 / 744  
 Height (in/mm) : 44.9 / 1141  
 Wheelbase (in/mm) : 29.3 / 744  
 Ground Clearance (in/mm) : 4.5 / 114  
 wet Weight : 445 / 202  
 Fuel Type : 4.3 / 16.3

# 2023 Honda CBR600RR ABS



Starting From \$7500

Engine: Standard  
 Engine Type: Horizontal In-line  
 Cylinders: 4  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid  
 Valves :16  
 Valves per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 12.2:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion: Standard  
 Carburetion Brand: Denso  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Speed Governor: No  
 Bore (mm/in): 67 / 2.64  
 Stroke (in/mm): 1.67 / 42.5

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length(in/mm):79.9/2029.5  
 Width (in/mm) : 27/685.8  
 Height (in/mm) : 43.9 /1151  
 Wheelbase (in/mm) : 53.9/1369.1  
 Ground Clearance (in/mm) : 5.3 / 134.6  
 wet Weight : 434/ 197  
 Fuel Capacity : 4.8 / 18.2  
 Fuel Capacity Reserve : 0.9 / 3.4  
 Displacement :599 / 36.6  
 Us Miles Per Gallon (Combined): 44  
 CAN Litres Per Kilometer (Combined): 5.3  
 Fuel Injector Size (mm): 40

# Honda CBR650R ABS



Starting From \$8000

Engine: Standard  
 Engine Type: In-line  
 Cylinders: 4  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid  
 Valves :16  
 Valves per Cylinder: 4  
 Valve Configuration: DOH  
 Compression Ratio: 11.6:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Speed Governor: No  
 Bore (mm/in): 67 / 2.64  
 Stroke (in/mm): 1.81 / 46

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length(in/mm):83.8/2128.5  
 Width (in/mm) : 29.5/749.3  
 Height (in/mm) : 45.2 /1148  
 Wheelbase (in/mm) : 57/1447.8  
 Ground Clearance (in/mm) : 5.2 / 132  
 wet Weight : 445/ 202  
 Fuel Capacity : 4.1 / 15.5  
 Fuel Capacity Reserve : 0.8 / 3



Starting From \$6500

## Honda CBR500R ABS

Engine: Standard  
 Engine Type: Parallel Twin  
 Cylinders: 2  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid  
 Valves :8  
 Valves per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 10.7:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Speed Governor: No  
 Displacement (cc/ci): 471 / 28.7

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length(in/mm): 81.9 / 2080  
 Width (in/mm) : 30.1 / 764.5  
 Height (in/mm) : 45.1 / 1145.5  
 Wheelbase (in/mm) : 55.5 / 1409.7  
 Ground Clearance (in/mm) : 5.1 / 129.5  
 wet Weight : 421 / 191  
 Fuel Capacity : 4.5 / 17  
 Us Miles Per Gallon (Combined): 72  
 CAN Litres Per Kilometer (Combined): 3.3  
 Fuel Injector Size (mm): 34



Starting From \$3800

## Honda CBR300R ABS

Engine: Standard  
 Engine Type: Single-Cylinder  
 Cylinders: 1  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid  
 Valves :4  
 Valves per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 10.7:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion: Standard  
 Carburetion Brand: Denso  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Speed Governor: No  
 Bore (mm/in): 76 / 2.99  
 Stroke (in/mm): 2.48 / 63  
 Displacement (cc/ci):286/ 17.4  
 Fuel Injector Size (mm): 38

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length(in/mm): 80 /2035  
 Width (in/mm) : 28.3/720  
 Height (in/mm) : 44 /1120  
 Wheelbase (in/mm) : 54.3/1379.2  
 Ground Clearance (in/mm) : 5.7 / 144.8  
 wet Weight :364/ 165  
 Fuel Capacity : 3.4 / 12.9



Starting From \$8000

## Honda CBR1000RR ABS

Engine: Standard  
 Engine Type: Horizontal In-line  
 Cylinders: 4  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid  
 Valves :16  
 Valves per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 13:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Speed Governor: No  
 Bore (mm/in): 76 / 2.99  
 Stroke (in/mm): 2.17 / 55  
 Displacement (cc/ci): 999.8 / 61  
 Fuel Injector Size (mm): 48

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length(in/mm):81.3/2065  
 Width (in/mm) : 28.1/713.7  
 Height (in/mm) : 44.2/1122.7  
 Wheelbase (in/mm) : 55.3/1404.6  
 Ground Clearance (in/mm) : 5 / 127  
 wet Weight : 434/ 197  
 Fuel Capacity : 4.2 / 16

## Yamaha YZF R1



Engine: Standard  
Engine Type: Horizontal In-line  
Cylinders: 4  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves :16  
Valves per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 13.0:1  
Starter: Electric  
Fuel Type: Gas  
Fuel requirements: Regular  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Speed Governor: No  
Bore (mm/in): 79 / 3.11  
Stroke (in/mm): 2 / 50.9  
Displacement (cc/ci): 998 / 60.9  
Fuel Injector Size (combined): 33

**FROM \$8000**

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length(in/mm):80.9/2054.9  
Width (in/mm) : 27.2/690.9  
Height (in/mm) : 45.9 /1165.9  
Wheelbase (in/mm) : 55.3/1404.6  
Ground Clearance (in/mm) : 5.1 / 129.5  
Wet Weight : 448/ 203.2  
Fuel Capacity : 4.5 / 17  
Engine Displacement to Weight (cc) : 2.23

## Yamaha YZF R1M



Engine: Standard  
Engine Type: Horizontal In-line  
Cylinders: 4  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves :16  
Valves per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 13.0:1  
Starter: Electric  
Fuel Type: Gas  
Fuel requirements: Regular  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Speed Governor: No  
Bore (mm/in): 79 / 3.11  
Stroke (in/mm): 2 / 50.9  
Displacement (cc/ci): 998 / 60.9  
Fuel Injector Size (mm): 33

**FROM \$17000**

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length(in/mm):80.9/2054.9  
Width (in/mm) : 27.2/690.9  
Height (in/mm) : 45.9 /1165.9  
Wheelbase (in/mm) : 55.3/1404.6  
Ground Clearance (in/mm) : 5.1 / 129.5  
Wet Weight : 448/ 203.2  
Fuel Capacity : 4.5 / 17  
Engine Displacement to Weight (cc) : 2.23

## Yamaha YZF R7



Engine: Standard  
Engine Type: Horizontal In-line  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves :8  
Valves per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 11.5:1  
Starter: Electric  
Fuel Type: Gas  
Fuel requirements: Regular  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Bore (mm/in): 80 / 3.15  
Stroke (in/mm): 2.7 / 68.6  
Displacement (cc/ci): 689 / 42  
US Miles Per Gallon (Hwy): 58

**FROM \$9900**

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length(in/mm):81.5/2070.1  
Width (in/mm) : 27.8/706.1  
Height (in/mm) : 45.7 /1160.8  
Wheelbase (in/mm) : 54.9/1394.5  
Ground Clearance (in/mm) : 5.3 / 134.6  
Wet Weight : 414/ 187.8  
Fuel Capacity : 3.4 / 12.9  
Engine Displacement to Weight (cc) : 1.66

## Yamaha YZF R6



Engine Type: Horizontal In-line  
 Cylinders: 4  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid  
 Valves :16  
 Valves per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 13.1:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel requirements: Regular  
 Turbocharged: No  
 Supercharged : No  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Speed Governor: No  
 Bore (mm/in): 67 / 2.64  
 Stroke (in/mm): 42.5 / 1.67  
 Displacement (cc/ci): 599 / 36.6  
 Us Miles Per  
 Gallon (combined): 33

**FROM \$6500**

Length(ft) : 6.9  
 Width (in/mm) : 27.4/696  
 Height (in/mm) : 45.9 /1165.9  
 Wheelbase  
 (in/mm) : 54.1/1374.1  
 Ground  
 Clearance  
 (in/mm) : 5.1 / 129.5  
 Length (ft/ft) : 6  
 Length (ft/in) : 8.3  
 Wet Weight : 419/ 190.1  
 Fuel Capacity : 4.6 / 17.4  
 Engine  
 Displacement to  
 Weight (cc) : 143

## Yamaha YZF R3



Engine: Standard  
 Engine Type: Parallel Twin  
 Cylinders: 2  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid  
 Valves :8  
 Valves per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 11.2:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel requirements: Regular  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Bore (mm/in): 68 / 2.68  
 Stroke (in/mm): 1.74 / 44.1  
 Displacement (cc/ci): 321 / 19.6  
 US Miles Per  
 Gallon (Combined): 56

**FROM \$3800**

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length(in/mm):82.3/2090.4  
 Width (in/mm) : 28.7/729  
 Height (in/mm) : 44.9 /1140.5  
 Wheelbase  
 (in/mm) : 54.3/1379.2  
 Ground  
 Clearance  
 (in/mm) : 6.3 / 160  
 Wet Weight : 375/ 170.1  
 Fuel Capacity : 3.7 / 14  
 Engine  
 Displacement to  
 Weight (cc) : 0.86

## BMW R 1250 GS Adventure



Engine: Standard  
 Engine Type: Flat Twin  
 Cylinders: 2  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid / Air  
 Horsepower RPM: 7750  
 Torque RPM: 6250  
 Valves :8  
 Valves per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 12.5:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel requirements: Premium  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Other Engine: Optional  
 Horsepower (bhp): 136  
 Torque (Nm): 143  
 Bore (mm/in): 102.5 / 4  
 Stroke (in/mm): 3 / 76  
 Displacement (cc/ci): 1254 / 76.5  
 US Miles Per Gallon (Hwy): 49.5  
 Fuel injector Size (mm): 52

**FROM \$15000**

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length(in/mm): 89.4/2270  
 Width (in/mm) : 38.6/980  
 Height (in/mm) : 57.5 /1460  
 Wheelbase  
 (in/mm) : 59.2/1504  
 Wet Weight : 591/ 268  
 Payload  
 Capacity (lbs/kg): 478/ 217  
 Fuel Capacity : 7.9 / 30  
 Fuel Capacity  
 Reserve (gal/l) : 1 / 4  
 Engine  
 Displacement to  
 Weight (cc) : 2.12

## BMW F 850 GS



Engine Type: Parallel Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Horsepower RPM: 8000  
Torque RPM: 6250  
Cooling: Liquid  
Valves: 4  
Valves per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 12.7:1  
Starter: Electric  
Fuel Type: Gas  
Fuel requirements: Premium  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Speed Governor: No  
Other Engines: Optional  
Horsepower (bhp): 90  
Torque (Nm): 86  
Bore (mm/in): 84 / 3.31  
Stroke (in/mm): 3.03 / 77  
Displacement (cc/ci): 853 / 52  
US Miles Per Gallon: 57  
Fuel Injector Size (mm): 46

**FROM \$10000**

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length(in/mm): 90.8/2305  
Width (in/mm) : 36.3/922  
Height (in/mm) : 53.4 /1356  
Wheelbase  
(in/mm) : 62.7/1593  
Payload  
Capacity  
(lbs/kgs) : 476 / 216  
Wet Weight : 504/ 229  
GVWR (lbs) : 981  
Fuel Capacity : 4 / 15  
Fuel Capacity  
Reserve : 0.9 / 3.5  
Engine  
Displacement to  
Weight (cc) : 0.86

## BMW F 750 GS



Engine: Standard  
Engine Type: Parallel Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Horsepower RPM: 7500  
Torque RPM: 6000  
Cooling: Liquid  
Valves: 8  
Valves per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 12.7:1  
Starter: Electric  
Fuel Type: Gas  
Fuel requirements: Premium  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Speed Governor: No  
Other Engine: Optional  
Horsepower (bhp): 77  
Torque (Nm): 83  
Bore (mm/in): 84 / 3.31  
Stroke (in/mm): 3.03 / 77  
Displacement (cc/ci): 853 / 52  
US Miles Per  
Gallon (Combined): 57

**FROM \$8000**

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length(in/mm): 88.8/2255  
Width (in/mm) : 36.2/922  
Height (in/mm) : 48.2 /1225  
Wheelbase  
(in/mm) : 61.4/1559  
Payload  
Capacity(lbs/kg): 476 / 213  
GVWR (lbs) : 970  
Wet Weight : 493/ 227  
Fuel Capacity : 4 / 15  
Fuel Capacity  
Reserve : 0.9 / 3.5  
Engine  
Displacement to  
Weight (cc) : 1.73

## BMW R 1200 GS



Engine: Standard  
Engine Type: Flat Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Cooling: Liquid / Air  
Horsepower RPM: 7750  
Torque RPM: 6250  
Valves: 8  
Valves per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 12.5:1  
Starter: Electric  
Fuel Type: Gas  
Fuel requirements: Premium  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Other Engine: Optional  
Horsepower (bhp): 125  
Torque (Nm): 125  
Bore (mm/in): 101 / 3.98  
Stroke (in/mm): 2.87 / 73  
Displacement (cc/ci): 1170 / 71.4  
US Miles Per Gallon (Hwy): 47.4  
Fuel Injector Size (mm): 52

**FROM \$9000**

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length(in/mm): 86.9/2207  
Width (in/mm) : 37.5/953  
Height (in/mm) : 55.6 /1412  
Wheelbase  
(in/mm) : 59.3/1507  
Wet Weight : 538/ 244  
Payload  
Capacity(lbs/kg): 1014 / 460  
Fuel Capacity : 5.3 / 20  
Fuel Capacity  
Reserve (gal/l) : 1 / 4  
Engine  
Displacement to  
Weight (cc) : 2.17

## BMW K 1600 GT



Engine: Standard  
 Engine Type: Parallel Twin  
 Cylinders: 6  
 Engine Stroke: 4-Stroke  
 Horsepower RPM: 6750  
 Torque RPM: 5250  
 Cooling: Liquid  
 Valves: 24  
 Valves per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 12.2:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel requirements: Premium  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Horsepower (bhp): 160  
 Torque (Nm): 178.9  
 Bore (mm/in): 72 / 2.83  
 Stroke (in/mm): 2.66 / 67.5  
 Displacement (cc/ci): 1649 / 100.6  
 US Miles Per Gallon (Combined): 40

**FROM \$11000**

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length(in/mm): 91.5/2324.1  
 Width (in/mm) : 39.4/1000  
 Height (in/mm) : 56.7 /1440.2  
 Wheelbase (in/mm) : 63.7/1618  
 Payload Capacity (lbs/kgs) : 434 / 196.9  
 Wet Weight : 756.2 / 343  
 GVWR (lbs) : 1190.5  
 Fuel Capacity : 7 / 26.5  
 Fuel Capacity Reserve : 1 / 4  
 Engine Displacement to Weight (cc) : 218

## BMW R 1200 RT



Engine Type: Flat Twin  
 Cylinders: 2  
 Engine Stroke: 4-Stroke  
 Horsepower RPM: 7500  
 Torque RPM: 6000  
 Cooling: Air / Oil  
 Valves: 8  
 Valves per Cylinder: 4  
 Valve Configuration: OHV  
 Compression Ratio: 12.0:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel requirements: Premium  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Horsepower (bhp/ kW): 110 / 82.1  
 Torque (Ft lbs/Nm): 85 / 115.2  
 Bore (mm/in): 101 / 3.98  
 Stroke (mm/in): 73 / 2.88  
 Displacement (cc/ci): 1170 / 71.4

**FROM \$9000**

Length (ft) : 7.32  
 Width (in/mm) : 35.6/904.2  
 Wheelbase (in/mm) : 58.4/1483.4  
 Ground Clearance (in/mm) : 6.1 / 154.9  
 Length (ft / ft) : 7  
 Length (ft/in) : 3.8  
 Dry Weight(lbs/kg): 505 / 229.1  
 Payload Capacity(lbs/kg): 1091 / 495  
 Wet Weight : 571/ 259  
 Fuel Capacity : 7.1 / 26.9  
 Fuel Capacity Reserve : 1 / 3.8  
 Storage Capacity (gall/ l): 7.9 / 35  
 Engine Displacement to Weight (cc) : 232

## Honda Gold Wing® F6B Deluxe



Engine: Standard  
 Engine Type: Horizontally Opposed  
 Cylinders: 6  
 Engine Stroke: 4-Stroke  
 Cooling: Liquid  
 Torque RPM: 6250  
 Valves: 12  
 Valves per Cylinder: 2  
 Valve Configuration: SOHC  
 Compression Ratio: 9.8:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Bore (mm/in): 72 / 2.92  
 Stroke (in/mm): 2.8 / 71  
 Displacement (cc/ci): 1832 / 111.8  
 US Miles Per Gallon (Combined): 34  
 CAN Liters Per Kilometer (Combined): 6.9  
 Fuel Injector Size (mm): 40

**FROM \$13000**

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Wheelbase (in/mm) : 66.5/1689.1  
 Wet Weight : 844 / 382.8  
 Fuel Capacity : 6.6 / 25

## Honda Gold Wing® Audio Comfort




Engine: Standard  
 Engine Type: Horizontally Opposed  
 Cylinders: 6  
 Engine Stroke: 4-Stroke  
 Horsepower (bhp/kW): 118 / 88.1  
 Torque (ft lbs/Nm): 125 / 169.5  
 Cooling: Liquid  
 Valves :12  
 Valves per Cylinder: 2  
 Valve Configuration: SOHC  
 Compression Ratio: 9.8:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion Brand: Keihin  
 Fuel Injector: Yes  
 Carburetor: No  
 Bore (mm/in): 74 / 2.92  
 Stroke (mm/in): 71 / 2.8  
 Displacement (cc/ci): 1832 / 111.8  
 US Miles Per Gallon (Combined): 35  
 CAN Liters Per Kilometer (Combined): 6.7  
 Fuel Injector Size (mm): 40

**FROM \$8000**

Performance: Standard  
 Wheelbase (in/mm) : 66.5 / 1689.1  
 Storage Capacity (cuft/gal/l) : 5.2 / 33.4 / 147  
 Wet Weight : 904 / 410.1  
 GVWR (lbs/kgs) : 1180 / 535  
 Fuel Capacity : 6.6 / 25

## Harley-Davidson Street Glide

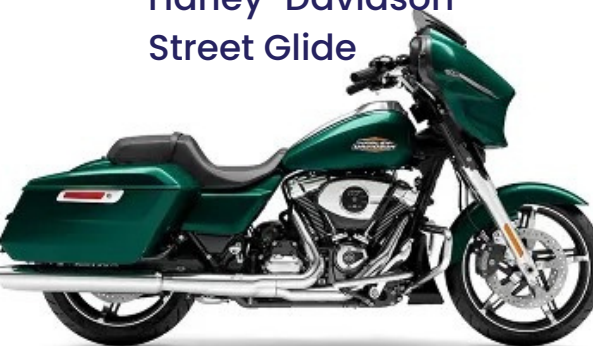

Engine: Standard  
 Engine Brand Name: Milwaukee-Eight 117  
 Engine Type: V Twin  
 Cylinders: 2  
 Engine Stroke: 4-Stroke  
 Horsepower RPM: 4600  
 Torque RPM: 3250  
 Cooling: Air / oil  
 Valves :8  
 Valves per Cylinder: 4  
 Valve Configuration: OHV - Pushrod  
 Compression Ratio: 10.3:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel requirements: Premium  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Horsepower (bhp): 105  
 Torque (Nm): 176  
 Bore (in/mm): 103.5 / 4.08  
 Stroke (mm/in): 4.5 / 114.3  
 Displacement (cc/ci): 1923 / 117  
 US Miles Per Gallon (Combined): 44  
 CAN Liters Per Kilometer (Combined): 5.3

**FROM \$13000**

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length (in/mm): 94.9 / 2410  
 Width (in/mm) : 38.4 / 975  
 Height (in/mm) : 53.1 / 1350  
 Wheelbase (in/mm) : 64 / 1625  
 Ground Clearance (in/mm) : 5.5 / 140  
 Dry Weight : 774 / 351  
 Wet Weight : 756.2 / 343  
 GVWR (lbs) : 1380  
 Fuel Capacity : 6 / 22.7  
 Fuel Capacity Reserve (gal/l) : 1 / 3.8  
 Storage Capacity (cuft/gal/l) : 2.4 / 15.4 / 68  
 Engine Displacement to Weight (cc) : 2.48

## Harley-Davidson Trike Tri Glide



Engine: Standard  
 Engine Brand Name: Twin-Cooled™ Milwaukee-Eight™ 114  
 Engine Type: V Twin  
 Cylinders: 2  
 Engine Stroke: 4-Stroke  
 Horsepower RPM: 5020  
 Torque RPM: 2500  
 Cooling: Liquid  
 Valves :8  
 Valves per Cylinder: 4  
 Valve Configuration: OHV - Pushrod  
 Compression Ratio: 10.5:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel Requirements: Premium  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Horsepower (bhp): 931  
 Torque (Nm): 163  
 Bore (mm/in): 102 / 4.02  
 Stroke (in/mm): 4.5 / 114.3  
 Displacement (cc/ci): 1868 / 114  
 US Miles Per Gallon (Combined): 42  
 CAN Liters Per Kilometer (Combined): 5.6

**FROM \$26000**

Dimensions : Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length (in/mm): 105.1 / 2670  
 Width (in/mm): 54.7 / 1390  
 Height (in/mm): 56.3 / 1430  
 Wheelbase (in/mm): 65.7 / 1670  
 Ground Clearance (in/mm): 4.9 / 125  
 Dry Weight (lbs/kg): 1199 / 544  
 Wet Weight (lbs/kg): 1237 / 561  
 GVWR (lbs): 1700  
 Fuel Capacity (gal/l): 6 / 22.7  
 Fuel Capacity Reserve (gal/l): 1 / 3.81  
 Storage Capacity (cuft/gal/l): 6.8 / 43.7 / 192.5  
 Engine Displacement to Weight (cc): 1.56



## Kawasaki Ninja® 650 ABS




Engine: Standard  
 Engine Type: Parallel Twin  
 Cylinders: 2  
 Engine Stroke: 4-Stroke  
 Horsepower RPM: 8000  
 Torque RPM: 6700  
 Cooling: Liquid  
 Valves: 8  
 Valves Per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 10.8:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel Requirements: Regular  
 Carburetion: Standard  
 Carburetion Brand: Keihin  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Speed Governor: No  
 Horsepower (bhp): 67  
 Torque (Nm): 65.8  
 Bore (mm/in): 83 / 3.3  
 Stroke (in/mm): 2.4 / 60  
 Displacement (cc/ci): 649 / 39.6  
 Fuel Injector Size (mm): 36

FROM \$8000

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length (in/mm): 80.9 / 2054.9  
 Width (in/mm): 29.1 / 739.1  
 Height (in/mm): 45.1 / 1145.5  
 Wheelbase (in/mm): 55.5 / 1409.7  
 Ground Clearance (in/mm): 5.1 / 129.5  
 Wet Weight (lbs/kg): 423.4 / 192  
 Fuel Capacity (gal/l): 4 / 15.1

## Kawasaki Ninja® ZX™-10R ABS

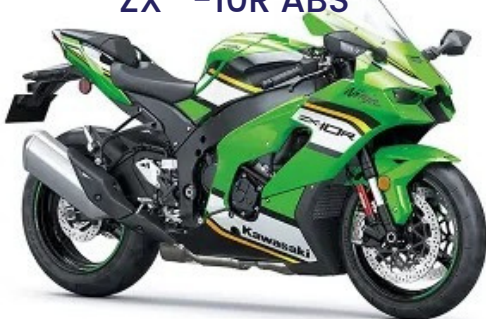

Engine: Standard  
 Engine Type: Horizontal In-line  
 Cylinders: 4  
 Engine Stroke: 4-Stroke  
 Torque RPM: 11300  
 Cooling: Liquid  
 Valves: 16  
 Valves Per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 13.0:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion: Standard  
 Carburetion Brand: Mikuni  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Speed Governor: No  
 Other Engine: Optional  
 Torque (Nm): 113.8  
 Bore (mm/in): 76 / 2.99  
 Stroke (in/mm): 2.17 / 55  
 Displacement (cc/ci): 998 / 60.9  
 Fuel Injector Size (mm): 47

FROM \$11000

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length (in/mm): 82.1 / 2085.3  
 Width (in/mm): 29.5 / 749.3  
 Height (in/mm): 46.7 / 1186.2  
 Wheelbase (in/mm): 57.1 / 1450.3  
 Ground Clearance (in/mm): 5.3 / 134.6  
 Wet Weight (lbs/kg): 456.4 / 207  
 Fuel Capacity (gal/l): 4.5 / 17

## Kawasaki Ninja® ZX™-6R



Engine: Standard  
 Engine Type: Horizontal In-line  
 Cylinders: 4  
 Engine Stroke: 4-Stroke  
 Horsepower RPM: 13500  
 Torque RPM: 10800  
 Cooling: Liquid  
 Valves: 16  
 Valves Per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 12.9:1  
 Starter: Electric  
 Fuel Type: Gas  
 Carburetion: Standard  
 Carburetion Brand: Keihin  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Speed Governor: No  
 Other Engine: Optional  
 Horsepower (bhp): 136  
 Torque (Nm): 70.8  
 Bore (mm/in): 67 / 2.64  
 Stroke (in/mm): 1.78 / 45.1  
 Displacement (cc/ci): 636 / 38.8  
 Fuel Injector Size (mm): 38

FROM \$7500

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length (in/mm): 79.7 / 2024.4  
 Width (in/mm): 28 / 711.2  
 Height (in/mm): 43.3 / 1099.8  
 Wheelbase (in/mm): 55.1 / 1399.5  
 Ground Clearance (in/mm): 5.1 / 130  
 Wet Weight (lbs/kg): 430 / 195  
 Fuel Capacity (gal/l): 4.5 / 17

## Benelli TRK 502 X

FROM \$7500



Engine: Standard  
Engine Type: Horizontal In-line  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Horsepower RPM: 8500  
Torque RPM: 6000  
Cooling: Liquid  
Valves: 8  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 11.5:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Regular  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 46.9  
Torque (Nm): 46  
Bore (mm/in): 69 / 2.72  
Stroke (in/mm): 2.63 / 66.8  
Displacement (cc/ci): 499.6 / 30.5  
Fuel Injector Size (mm): 37

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 86.6 / 2200  
Width (in/mm): 36 / 915  
Height (in/mm): 58.6 / 1490  
Wheelbase (in/mm): 60 / 1525  
Ground Clearance (in/mm): 8.6 / 220  
Dry Weight (lbs/kg): 469.6 / 213  
Fuel Capacity (gal/l): 5.28 / 20  
Fuel Capacity Reserve (gal/l): 0.8 / 3  
Engine Displacement to Weight (cc): 1.06

## Benelli TRK 702

FROM \$12000



Engine: Standard  
Engine Type: Parallel Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Horsepower RPM: 8000  
Torque RPM: 6000  
Cooling: Liquid  
Valves: 8  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 11.6:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Regular  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 69  
Torque (Nm): 70  
Bore (mm/in): 83 / 3.27  
Stroke (in/mm): 2.54 / 64.5  
Displacement (cc/ci): 698 / 42.6  
Fuel Injector Size (mm): 41

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 87.4 / 2200  
Width (in/mm): 36.4 / 925  
Height (in/mm): 54.7 / 1390  
Wheelbase (in/mm): 59.2 / 1505  
Ground Clearance (in/mm): 7.4 / 190  
Dry Weight (lbs/kg): 482.8 / 219  
Payload Capacity (lbs/kgs): 445.3 / 202  
Fuel Capacity (gal/l): 5.28 / 20  
Fuel Capacity Reserve (gal/l): 0.8/3

## BMW S 1000 RR 2015 and LESS

FROM \$12000



Engine: Standard  
Engine Type: Horizontal In-line  
Cylinders: 4  
Engine Stroke: 4-Stroke  
Horsepower RPM: 13750  
Torque RPM: 11000  
Cooling: Liquid  
Valves: 16  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 13.3:11  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Other Engine: Optional  
Horsepower (bhp): 205  
Torque (Nm): 113  
Bore (mm/in): 80 / 3.15  
Stroke (in/mm): 1.96 / 49.7  
Displacement (cc/ci): 999 / 60.9  
US Miles Per Gallon (Hwy): 37

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 81.6 / 2073  
Width (in/mm): 33.4 / 848  
Height (in/mm): 47.4 / 1204  
Wheelbase (in/mm): 57.4 / 1458  
Dry Weight (lbs/kg): 385.8 / 175  
Wet Weight (lbs/kg): 434.3 / 197  
Payload Capacity (lbs/kgs): 463 / 210  
GVWR (lbs): 897  
Fuel Capacity (gal/l): 4.4 / 16.5  
Fuel Capacity Reserve (gal/l): 1/4  
Engine Displacement to Weight (cc): 2.59

## BMW S 1000 RR 2016 AND LESS

FROM \$15000



Engine: Standard  
 Engine Type: Horizontal In-line  
 Cylinders: 4  
 Engine Stroke: 4-Stroke  
 Horsepower RPM: 13000  
 Torque RPM: 11000  
 Cooling: Liquid  
 Valves: 16  
 Valves Per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 13.3:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel Requirements: Premium  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Other Engine: Optional  
 Horsepower (bhp): 205  
 Torque (Nm): 113  
 Bore (mm/in): 80 / 3.15  
 Stroke (in/mm): 1.96 / 49.7  
 Displacement (cc/ci): 999 / 60.9  
 US Miles Per Gallon (Hwy): 37

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length (in/mm): 81.6 / 2073  
 Width (in/mm): 33.4 / 848  
 Height (in/mm): 45.3 / 1151  
 Wheelbase (in/mm): 56.7 / 1441  
 Wet Weight (lbs/kg): 434 / 197  
 Payload Capacity (lbs/kg): 463 / 201  
 GVWR (lbs): 895  
 Fuel Capacity (gal/l): 4.4 / 16.5  
 Fuel Capacity Reserve (gal/l): 1/4  
 Engine Displacement to Weight (cc): 2.3

## BMW M 1000 R

FROM \$12000



Engine: Standard  
 Engine Type: Horizontal In-line  
 Cylinders: 4  
 Engine Stroke: 4-Stroke  
 Horsepower RPM: 13750  
 Torque RPM: 11100  
 Cooling: Liquid  
 Valves: 16  
 Valves Per Cylinder: 4  
 Valve Configuration: DOHC  
 Compression Ratio: 13.3:1  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel Requirements: Premium  
 Carburetion: Standard  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Horsepower (bhp): 205  
 Torque (Nm): 113  
 Bore (mm/in): 80 / 3.15  
 Stroke (in/mm): 1.96 / 49.7  
 Displacement (cc/ci): 999 / 60.9

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length (in/mm): 82.1 / 2085.3  
 Width (in/mm): 39.2 / 995.7  
 Height (in/mm): 46.3 / 1176  
 Wheelbase (in/mm): 57.3 / 1455.4  
 Wet Weight (lbs/kg): 438.7 / 199  
 Payload Capacity (lbs/kg): 462 / 209.9  
 Fuel Capacity (gal/l): 4.3 / 16.3  
 Fuel Capacity Reserve (gal/l)  
 1 / 3.8

## CFMOTO SS 450

FROM \$4500



Engine: Standard  
 Engine Type: Parallel Twin  
 Cylinders: 2  
 Engine Stroke: 4-Stroke  
 Horsepower RPM: 9500  
 Torque RPM: 7600  
 Cooling: Liquid  
 Valves: 4  
 Valves Per Cylinder: 4  
 Valve Configuration: DOHC  
 Starter: Electric  
 Fuel Type: Gas  
 Fuel Requirements: Regular  
 Carburetion: Standard  
 Carburetion Brand: Bosch  
 Fuel Injector: Yes  
 Carburetor: No  
 Carburetion Type: Fuel Injected  
 Horsepower (bhp): 50  
 Torque (Nm): 39  
 Bore (mm/in): 77/3  
 Stroke (in/mm): 2.2 / 55.2  
 Displacement (cc/ci): 450 / 27.5

Dimensions: Standard  
 Weight: Standard  
 Capacities: Standard  
 Performance: Standard  
 Length (in/mm): 79 / 2006.6  
 Width (in/mm): 29.5 / 749.3  
 Height (in/mm): 39 / 990.6  
 Wheelbase (in/mm): 53.5 / 1358.9  
 Dry Weight (lbs/kg): 370 / 167.8  
 Fuel Capacity (gal/l): 3.7 / 14  
 Engine Displacement to Weight (cc): 1.22

## CFMOTO 300 SS

FROM \$3800



Engine: Standard  
Engine Type: Single-Cylinder  
Cylinders: 1  
Engine Stroke: 4-Stroke  
Horsepower RPM: 8750  
Torque RPM: 7250  
Cooling: Liquid  
Valves: 4  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Regular  
Carburetion: Standard  
Carburetion Brand: Bosch  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 29  
Torque (Nm): 25.4  
Bore (mm/in): 78/3  
Stroke (in/mm): 2.4 / 61.2  
Displacement (cc/ci): 292/ 17.8

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 79 / 2006.6  
Width (in/mm): 29.5 / 749.3  
Height (in/mm): 39 / 990.61  
Wheelbase (in/mm): 53.5 / 1358.9  
Dry Weight (lbs/kg): 364 / 165.1  
Fuel Capacity (gal/l): 3.2 / 12.1  
Engine Displacement to Weight (cc): 0.8

## CFMOTO NK 450

FROM \$4500



Engine: Standard  
Engine Type: Parallel Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Horsepower RPM: 9500  
Torque RPM: 7600  
Cooling: Liquid  
Valves: 4  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Regular  
Carburetion: Standard  
Carburetion Brand: Bosch  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 50  
Torque (Nm): 39  
Bore (mm/in): 77/3  
Stroke (in/mm): 2.2 / 55.2  
Displacement (cc/ci): 450 / 27.5

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 78.7 / 1999  
Width (in/mm): 31.9 / 810.3  
Height (in/mm): 44.5 / 1130.3  
Wheelbase (in/mm): 53.9 / 1369.1  
Dry Weight (lbs/kg): 364 / 165.1  
Fuel Capacity (gal/l): 3.7 / 14  
Engine Displacement to Weight (cc): 1.24

## KTM Duke 390

FROM \$6000



Engine: Standard  
Engine Type: Single-Cylinder  
Cylinders: 1  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves: 4  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 12.9:11  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 44  
Bore (mm/in): 8.9 / 3.5  
Stroke (in/mm): 2.86 / 60  
Displacement (cc/ci): 373.2 / 22.81

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Wheelbase (in/mm): 53.8 / 1367  
Ground Clearance (in/mm): 6.7 / 170  
Dry Weight (lbs/kg): 306 / 139  
GVWR (lbs): 739  
Fuel Capacity (gal/l): 2.9 / 11  
Engine Displacement to Weight (cc): 1.22

## Suzuki GSX-R 750

FROM \$7000



Engine: Standard  
Engine Type: Horizontal In-line  
Cylinders: 4  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves: 16  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 12.5:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Regular  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Bore (mm/in): 70 / 2.76  
Stroke (in/mm): 1.92 / 48.7  
Displacement (cc/ci): 750 / 45.81  
Fuel Injector Size (mm): 50

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 79.9 / 2030  
Width (in/mm): 28 / 710  
Height (in/mm): 44.7 / 1135  
Wheelbase (in/mm): 54.7 / 1390  
Turning Radius (ft): 11.2  
Ground Clearance (in/mm): 5.1 / 130  
Wet Weight (lbs/kg): 419 / 190  
Fuel Capacity (gal/l): 4.5 / 17

## Suzuki GSX-R 1000RZ

FROM \$5500



Engine: Standard  
Engine Type: Horizontal In-line  
Cylinders: 4  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves: 16  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 13.2:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Regular  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Bore (mm/in): 76 / 2.99  
Stroke (in/mm): 2.17 / 55.1  
Displacement (cc/ci): 999.8/61  
Fuel Injector Size (mm): 49

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 81.7 / 2075  
Width (in/mm): 27.8 / 705  
Height (in/mm): 45.1 / 1145  
Wheelbase (in/mm): 55.9 / 1420  
Turning Radius (ft): 11.5  
Ground Clearance (in/mm): 5.1 / 130  
Wet Weight (lbs/kg): 445 / 202  
Fuel Capacity (gal/l): 4.2 / 16

## Suzuki GSX-R 1000

2016 AND UP FROM \$8000  
2015 AND LESS

FROM \$7500



Engine: Standard  
Engine Type: Horizontal In-line  
Cylinders: 4  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves: 16  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 13.2:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Regular  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Bore (mm/in): 76 / 2.99  
Stroke (in/mm): 2.17 / 55.1  
Displacement (cc/ci): 999.8/61  
Fuel Injector Size (mm): 49

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 81.7 / 2075  
Width (in/mm): 27.8 / 705  
Height (in/mm): 45.1 / 1145  
Wheelbase (in/mm): 55.9 / 1420  
Turning Radius (ft): 11.5  
Ground Clearance (in/mm): 5.1 / 130  
Wet Weight (lbs/kg): 443 / 201  
Fuel Capacity (gal/l): 4.2 / 16

## Suzuki GSX-R 250r

FROM \$3800



Engine Type: Parallel Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves: 8  
Valves Per Cylinder: 4  
Valve Configuration: SOHC  
Bore (mm/in): 53.5 / 2.1  
Stroke (mm/in): 55.2 / 2.17  
Displacement (cc/ci): 248 / 15.1  
Compression Ratio: 11.5:1  
Starter: Electric  
Fuel Requirements: Regular  
US Miles Per Gallon (Combined): 76  
CAN Liters Per Kilometer (Combined): 3.1  
Fuel Type: Gas  
Turbocharged: No  
Supercharged: No  
Maximum Range (mi/km): 280 / 450.6  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected

Length (ft): 6.84  
Width (in/mm): 29 / 740  
Height (in/mm): 43.7 / 1110  
Wheelbase (in/mm): 56.3 / 1430  
Ground Clearance (in/mm): 6.3 / 160  
Length (ft/in): 6  
Length (ft/in): 10.1  
Wet Weight (lbs/kg): 392 / 178  
Fuel Capacity (gal/l): 4 / 15  
Performance: Standard

## CFMOTO 650 TK

FROM \$7100



Engine Type: Parallel Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Horsepower (bhp/kW): 60.3 / 45  
Horsepower RPM: 9000  
Torque (Ft Lbs/Nm): 41 / 96  
Torque RPM: 7000  
Cooling: Liquid  
Valves: 8  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Bore (mm/in): 83 / 3.3  
Stroke (mm/in): 60 / 2.4  
Displacement (cc/ci): 649.3 / 39.6  
Compression Ratio: 11.3:1  
Starter: Electric  
Fuel Requirements: Regular  
Fuel Type: Gas  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected

Length (ft): 7.03  
Width (in/mm): 32.2 / 820  
Height (in/mm): 50.8 / 1290  
Wheelbase (in/mm): 55.7 / 1415  
Ground Clearance (in/mm): 5.5 / 140  
Length (ft/in): 7  
Length (ft/in): 0.4  
Dry Weight (lbs/kg): 458.6 / 208  
Wet Weight (lbs/kg): 485 / 220  
Fuel Capacity (gal/l): 4.6 / 17.5  
Engine Displacement to Weight (cc): 1.42

## Indian Chieftain®

FROM \$15000



Engine: Standard  
Engine Brand Name: Thunder Stroke 116  
Engine Type: V Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Torque RPM: 2900  
Cooling: Air  
Valves: 4  
Valves Per Cylinder: 2  
Valve Configuration: OHV - Pushrod  
Compression Ratio: 11:1  
Starter: Electric  
Fuel Type: Gas  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Speed Governor: No  
Torque (Nm): 168  
Bore (mm/in): 103.2 / 4.06  
Stroke (in/mm): 4.45 / 113  
Displacement (cc/ci): 1901 / 116  
Fuel Injector Size (mm): 54

Dimensions: Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 98.7 / 2506  
Width (in/mm): 40.3 / 1023  
Height (in/mm): 51.6 / 1310  
Wheelbase (in/mm): 65.7 / 1668  
Ground Clearance (in/mm): 5.1 / 130  
Dry Weight (lbs/kg): 791 / 359  
Wet Weight (lbs/kg): 823 / 373  
GVWR (lbs): 1385  
Fuel Capacity (gal/l): 5.5 / 20.8  
Engine Displacement to Weight (cc): 2.4

## Indian Roadmaster®

FROM \$17000



Engine Brand Name: Thunder Stroke 116  
Engine Type: V Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Torque RPM: 2900  
Cooling: Air  
Valves: 4  
Valves Per Cylinder: 2  
Valve Configuration: OHV - Pushrod  
Compression Ratio: 11:1  
Starter: Electric  
Fuel Type: Gas  
Carburetor: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Speed Governor: No  
Horsepower (bhp): 92  
Torque (Nm): 168  
Bore (mm/in): 103.2 / 4.06  
Stroke (in/mm): 4.45 / 113  
Displacement (cc/ci): 1890 / 116  
Fuel Injector Size (mm): 54

Dimension: Standard  
Length (in/mm): 102.1 / 2593.3  
Width (in/mm): 40.2 / 1022  
Height (in/mm): 55.7 / 1415  
Wheelbase (in/mm): 65.7 / 1669  
Ground Clearance (in/mm): 5.5 / 140  
Weight: Standard  
Dry Weight (lbs/kg): 858 / 389  
Wet Weight (lbs/kg): 890 / 403  
GWR (lbs): 1385  
Capacities: Standard  
Fuel Capacity (gal/l): 5.5 / 20.8  
Performance: Standard  
Engine Displacement to Weight (cc): 212

## CFMOTO 250sr

FROM \$3500



Engine Type: Single-cylinder, liquid-cooled, DOHC  
Displacement: 249 cc  
Bore x Stroke: 72 x 61.2 mm  
Maximum Power: 20.5 kW / 9750 rpm  
Maximum Torque: 22 Nm / 7250 rpm  
Transmission: Wet multi plate, slipper clutch

Length x Width x Height: 2010 x 750 x 1060 mm  
Wheelbase: 1360 mm  
Minimum Ground Clearance: 120 mm  
Curb Weight: 165 kg  
Fuel Capacity: 12 L

## Ruben 400cc

FROM \$3500



Type: Racing Motorcycle  
Displacement: 400cc  
Engine Type: 4-Stroke  
Fuel: Gas / Diesel  
Certification: CCC, CQC  
Engine Size: 251 to 500cc  
Braking Mode: Front and Rear Disc Brakes  
Cooling Method: Water Cooling  
Year Range: After 2010  
Ignition: CDI / EFI  
Lighting: LED  
Instrument: LCD  
Max Speed: 150 km/h  
Trademark: BOSSLINE OR OEM  
Transport Package: Iron + Carton  
Specification: 2060 \* 720 \* 1110 mm

## QJMOTOR 250RS

FROM \$3500



Dimensions (LxWxH): 2080 × 820 × 785 mm  
Engine: 2-cylinder In-line, 4-stroke, 8 Valves, DOHC  
Displacement: 249 cc  
Clutch: Wet Multiplate with ASC  
Transmission: 6-speed  
Horsepower: 31.0 HP @ 11000.0 RPM  
Frame: Backbone Type  
Torque: 21.2 Nm @ 9000.0 RPM  
Bore & Stroke: 62 × 42.7 mm  
Compression Ratio: 12:1  
Starting: Electric Start  
Ground Clearance: 140 mm  
Top Speed: 180 KM/H  
Petrol Capacity: 13 L  
Fuel Average: 35.0 KM/L  
Dry Weight: 176 KG

## QJMOTOR 600cc

FROM \$6500



Type: Liquid-Cooled, DOHC  
Engine Type: 4-Cylinder, 16 Valves  
ABS: Dual Channel  
Screen type: 5" TFT Panel  
Ignition System: EFI  
Tech Features: LED Lights, USB port, Keyless  
Max Power: 60 kW @ 11,000 rpm  
Max Torque: 51 Nm @ 10,500 rpm  
Displacement: 600cc  
Front Suspension: KYB Telescopic Upside-Down  
Front Brake: 320 mm Dual Hydraulic Disc BREMBO  
Rear Brake: 260 mm Hydraulic Disc BREMBO  
Rear Suspension: KYB Telescopic coil spring oil damped  
Fuel Tank Capacity: 16.4 Liters Gasoline  
Seat Height: 800 mm  
Transmission: 6 Speed Manual  
Dimensions: 2140 × 750 × 1150 mm  
Weight: 225 kg  
Wheelbase: 1460 mm  
Price: PHP 528,000  
Tires: 120/70 - 17 Tubeless (Front), MAXXIS 180/55 - 17 Tubeless (Rear)

## Ducati Panigale V4 S

FROM \$17000



Engine Brand Name: Desmosedici Stradale  
Engine Type: V4  
Cylinders: 4  
Engine Stroke: 4-Stroke  
Horsepower RPM: 12500  
Torque RPM: 11000  
Cooling: Liquid  
Valves: 16  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 14:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 210  
Torque (Nm): 122.8  
Bore (mm/in): 81 / 3.19  
Stroke (in/mm): 2.11 / 53.5  
Displacement (cc/ci): 1103 / 67.3

Dimensions  
Standard  
Weight: Standard  
Capacities: Standard  
Performance: Standard  
Length (in/mm): 82.7 / 2100  
Width (in/mm): 31.7 / 805  
Wheelbase (in/mm): 57.8 / 1469  
Ground Clearance (in/mm): 4.9 / 125  
Dry Weight (lbs/kg): 384 / 174  
Wet Weight (lbs/kg): 431 / 195.5  
Fuel Capacity (gal/l): 4.5 / 17  
Engine Displacement to Weight (cc): 2.87



## Ducati Streetfighter V4

FROM \$16500



Engine: Standard  
Engine Brand Name: Desmosedici Stradale  
Engine Type: V4  
Cylinders:  
Engine Stroke: 4-Stroke  
Horsepower RPM: 13000  
Torque RPM: 9500  
Cooling: Liquid  
Valves: 16  
Valves Per Cylinder:  
Valve Configuration: DOHC  
Compression Ratio: 14:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 208  
Torque (Nm): 123  
Bore (mm/in): 81 / 3.19  
Stroke (in/mm): 2.11 / 53.5  
Displacement (cc/ci): 1103 / 67.3

Dimensions: Standard  
Wheelbase (in/mm): 58.6 / 1488  
Weight: Standard  
Dry Weight (lbs/kg): 397 / 180  
Wet Weight (lbs/kg): 444 / 201.5  
Capacities: Standard  
Fuel Capacity (gal/l): 4.5 / 17  
Performance: Standard  
Engine Displacement to Weight (cc): 2.79

## Honda Forza ABS

FROM \$4500



Engine Type: Single-Cylinder  
Cylinders: 1  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves: 4  
Valves Per Cylinder: 4  
Valve Configuration: SOHC  
Bore (mm/in): 72 / 2.83  
Stroke (mm/in): 68.5 / 2.7  
Displacement (cc/ci): 279.2 / 17  
Compression Ratio: 10.5:1  
Starter: Electric  
Fuel Requirements: Regular  
Fuel Type: Gas  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Speed Governor: No

Wheelbase (in/mm): 60.9 / 1546.9  
Wet Weight (lbs/kg): 428 / 194.1  
Fuel Capacity (gal/l): 3 / 11.4  
Performance: Standard

## Vespa GTS Super 300

FROM \$3500



Engine: Standard  
Engine Brand Name: I-get  
Engine Type: Single-Cylinder  
Cylinders:  
Engine Stroke: 4-Stroke  
Horsepower RPM: 8250  
Torque RPM: 5250  
Cooling: Liquid  
Valves: 3  
Valves Per Cylinder: 3  
Valve Configuration: SOHC  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 23.8  
Torque (Nm): 26.7  
Bore (mm/in): 75 / 2.95  
Stroke (in/mm): 2.48 / 63  
Displacement (cc/ci): 278 / 17  
US Miles Per Gallon (Combined): 73.4  
CAN Liters Per Kilometer (Combined): 3.2

Dimensions: Standard  
Length (in/mm): 76.7 / 1948.2  
Width (in/mm): 29.7 / 755  
Wheelbase (in/mm): 54.1 / 1375  
Weight: Standard  
Capacities: Standard  
Fuel Capacity (gal/l): 2.2 / 8.5  
Performance: Standard

## KTM Duke 790

FROM \$7000



Engine: Standard  
Engine Brand Name: LC8C  
Engine Type: Parallel Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Torque RPM: 8000  
Cooling: Liquid  
Valves: 8  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Carburetion Brand: Bosch  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 105  
Torque (Nm): 87  
Bore (mm/in): 88 / 3.46  
Stroke (in/mm): 2.59 / 65.7  
Displacement (cc/ci): 799 / 48.7

Dimensions: Standard  
Weight: Standard  
Dry Weight (lbs/kg): 372.6 / 169  
Capacities: Standard  
Fuel Capacity (gal/l): 3.7 / 14.3  
Performance: Standard  
Engine Displacement to Weight (cc): 2.14

## KTM Duke 250

FROM \$4500



Engine: Standard  
Engine Brand Name: LC4c  
Engine Type: Single-Cylinder  
Cylinders: 1  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves: 4  
Valves Per Cylinder:  
Valve Configuration: DOHC  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Carburetion Brand: Bosch  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 30.8  
Torque (Nm): 25  
Bore (mm/in): 72 / 2.83  
Stroke (in/mm): 2.41 / 61.2  
Displacement (cc/ci): 249 / 15.2

## KTM Super Duke 1290 R EVO

FROM \$10800



Engine: Standard  
Engine Brand Name: LC8  
Engine Type: V Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Torque RPM: 7000  
Cooling: Liquid  
Valves:  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 13.6:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Carburetion Brand: Keihin  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 180  
Torque (Nm): 140  
Bore (mm/in): 108 / 4.25  
Stroke (in/mm): 2.8 / 71  
Displacement (cc/ci): 1301 / 79.4  
Fuel Injector Size (mm): 56

Dimensions: Standard  
Wheelbase (in/mm): 58.3 / 1482  
Ground Clearance (in/mm): 5.6 / 141  
Weight: Standard  
Dry Weight (lbs/kg): 423 / 192  
Capacities: Standard  
Fuel Capacity (gal/l): 4.2 / 16  
Performance: Standard

## KTM Duke 890 R

FROM \$8000



Engine: Standard  
Engine Brand Name: LC8C  
Engine Type: Parallel Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves: 8  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 13.5:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Carburetion Brand: Dell'Orto  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 119.3  
Bore (mm/in): 90.7 / 3.57  
Stroke (in/mm): 2.71 / 68.8  
Displacement (cc/ci): 889 / 54.2

Dimensions: Standard  
Wheelbase (in/mm): 58.3 / 1482  
Ground Clearance (in/mm): 8.1 / 206  
Weight: Standard  
Dry Weight (lbs/kg): 389.6 / 176.7  
GWR (lbs): 948  
Capacities: Standard  
Fuel Capacity (gal/l): 3.7 / 14  
Performance: Standard  
Engine Displacement to Weight (cc): 2.28

## KTM Super Duke 1390 R EVO

FROM \$12000



Engine: Standard  
Engine Brand Name: LC8  
Engine Type: V Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Torque RPM: 7000  
Cooling: Liquid  
Valves: 8  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Carburetion Brand: Keihin  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 188  
Torque (Nm): 145  
Bore (mm/in): 110 / 4.33  
Stroke (in/mm): 2.8 / 71  
Displacement (cc/ci): 1350 / 82.4

Dimensions: Standard  
Ground Clearance (in/mm): 5.9 / 149  
Weight: Standard  
Dry Weight (lbs/kg): 440.9 / 200  
Capacities: Standard  
Fuel Capacity (gal/l): 4.6 / 17.5  
Performance: Standard

## KTM Super Duke 1290 GT

FROM \$11000



Engine: Standard  
Engine Brand Name: LC8  
Engine Type: V Twin  
Cylinders: 2  
Engine Stroke: 4-Stroke  
Cooling: Liquid  
Valves: 8  
Valves Per Cylinder: 4  
Valve Configuration: DOHC  
Compression Ratio: 13.2:1  
Starter: Electric  
Fuel Type: Gas  
Fuel Requirements: Premium  
Carburetion: Standard  
Carburetion Brand: Keihin  
Fuel Injector: Yes  
Carburetor: No  
Carburetion Type: Fuel Injected  
Horsepower (bhp): 175  
Torque (Nm): 141  
Bore (mm/in): 108 / 4.25  
Stroke (in/mm): 2.8 / 71  
Displacement (cc/ci): 1301 / 79.4  
Fuel Injector Size (mm): 56

Dimensions: Standard  
Wheelbase (in/mm): 58.3 / 1482  
Weight: Standard  
Dry Weight (lbs/kg): 451.9 / 205  
Wet Weight (lbs/kg): 502.6 / 228  
Capacities: Standard  
Fuel Capacity (gal/l): 6.1 / 23  
Performance: Standard  
Ground Clearance (in/mm): 5.6 / 141  
Engine Displacement to Weight (cc): 2.88

# Body Armor \$250



Boots \$160



\$90



Gloves \$25



# Jackets \$70



8553 咖啡色







Bluetooth Devices  
for Calls & music

\$75



Siri

小爱同学



# Helmet \$80



优质犄角



# Helmet \$160 includes bluetooth device



犄角+蓝牙

# Helmet \$75



# Boots

\$85



**PRO-BIKER**  
RACING EQUIPMENT



# CHIUTSI-UTSI



## Your Motorcycle Journey Begins Here

Thank you for exploring our collection. Each motorcycle is crafted with passion and precision.

Ride with SMKROADKINGS and experience the thrill and excellence of our meticulously designed bikes.

[www.smkroadkings.com](http://www.smkroadkings.com)